


# STEVPRIS MK5



A versatile High Holding Power (HHP) anchor with adjustable shank (32, 41 & 50 degrees) to accommodate the soil condition. The most applied anchor in the offshore industry.

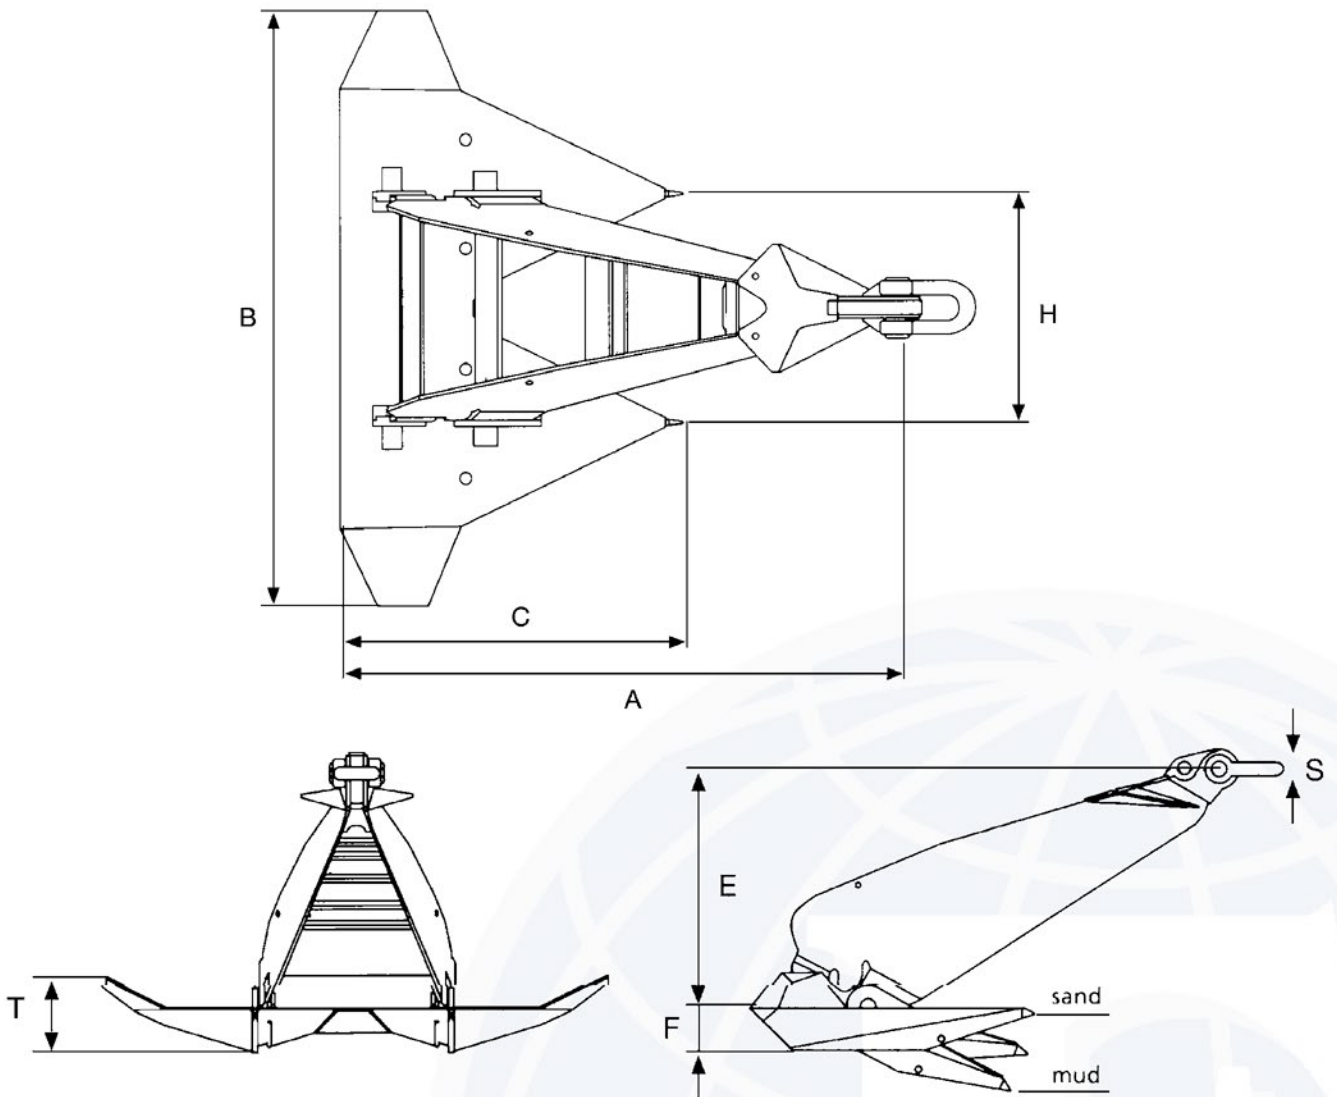

Anchor Weight (kg)	1500	3000	5000	8000	10000	12000	15000	18000	20000	22000	25000	30000	65000
A	2954	3721	4412	5161	5559	5908	6364	6763	7004	7230	7545	8018	10375
B	3184	4011	4756	5563	5992	6368	6860	7290	7550	7794	8133	8643	11184
C	1812	2283	2707	3166	3410	3624	3904	4149	4297	4436	4629	4919	6365
E	1505	1896	2248	2629	2832	3010	3242	3446	3569	3684	3844	4085	5286
F	271	342	406	474	511	543	585	622	644	665	694	737	954
H	1230	1550	1837	2149	2315	2460	2650	2816	2917	3011	3142	3339	4321
T	493	622	738	862	929	988	1064	1131	1171	1209	1262	1341	1736
S	80	90	110	130	140	150	170	180	190	200	200	220	300

